


6GSPWP GLOBAL STANDARD PISTON WELLPOINT





PUMP MATERIAL Cast Iron Pump Liquid End **Brass** Valve Seat, Weight, Spring & Washer Valve **NBR Gear Casing** SG Cast Iron Valve Stem 304 Stainless Steel Cylinder Liner 316 Stainless Steel Leather Piston Cup Piston Rod 304 Stainless Steel Piston Rod Seal Gland Packing Skid & Frame Hot Dipped Galvanized Steel Roof, Panels & Doors Steel Fuel Tank Steel


Global Pump Standard Piston Wellpoint pumps are robust, highly efficient and designed for the demanding requirements of such applications as wellpoint dewatering, under drain sock dewatering and remediation or other dewatering.


Capable of starting dry and operating for long uninterrupted periods with high fuel efficiency and low maintenance. The self priming 6GSPWP will pump water with or without air along with all combinations in between. The 6GSPWP is inherently self priming and the very gentle pulsation of the flow from the piston pump prevents wellpoint clogging, reduces piping losses and helps maintain vacuum and efficiency.


In keeping with all other Global Pump products the 6GSPWP provides a reliable, robust and efficient solution at the lowest overall cost of ownership.

The 6GSPWP is available with standard diesel engine drive or optional electric motor drive and standard skid mount or optional trailer mount. For quiet operation the optional SoundGuard enclosure reduces the noise level to as low as 48 dBa at 33 feet (10 meters).

SPECIFICATIONS	
Connections	6" (150 mm) QD fittings
Maximum Pump Speed	70 rpm (420 rpm at pulley)
Maximum Drive Speed	1,800 rpm
Maximum Flow	374 gpm (85 m ³ /h)
Maximum Head	81' (27 m)
Maximum Static Lift	30' (9 m)
Sound Attenuation	48 dBa at 33' (10 m)
Typical Fuel Consumption	0.4 gal/h (1.5 l/h)
Volumetric Efficiency	Up to 90%
Fuel Tank Capacity	52.8 gal (200 L)
Piston Pump Type	Duplex Double Acting
Dry Weight	4,730 lbs (2,130 kg)





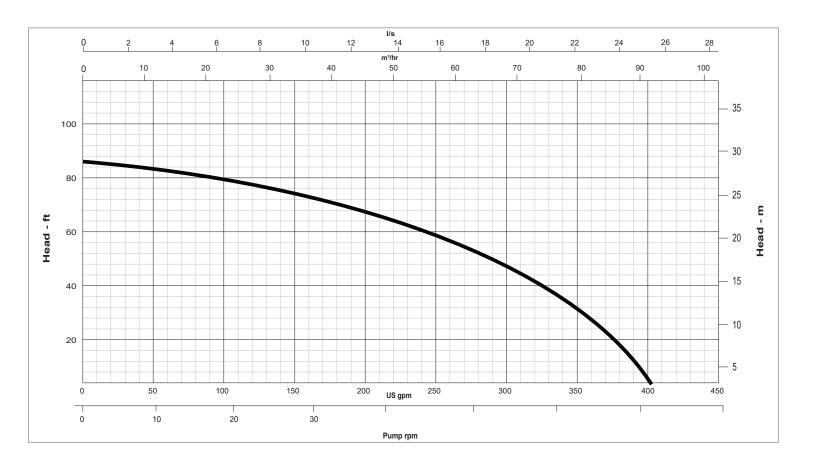



GLOBAL PUMP

10162 East Coldwater Road, Davison, MI 48423 Tel: 810.653.4828 Fax: 810.658.0632

1.866.360.PUMP

www.globalpump.com