



Performance Curve

elastomer quality: standard

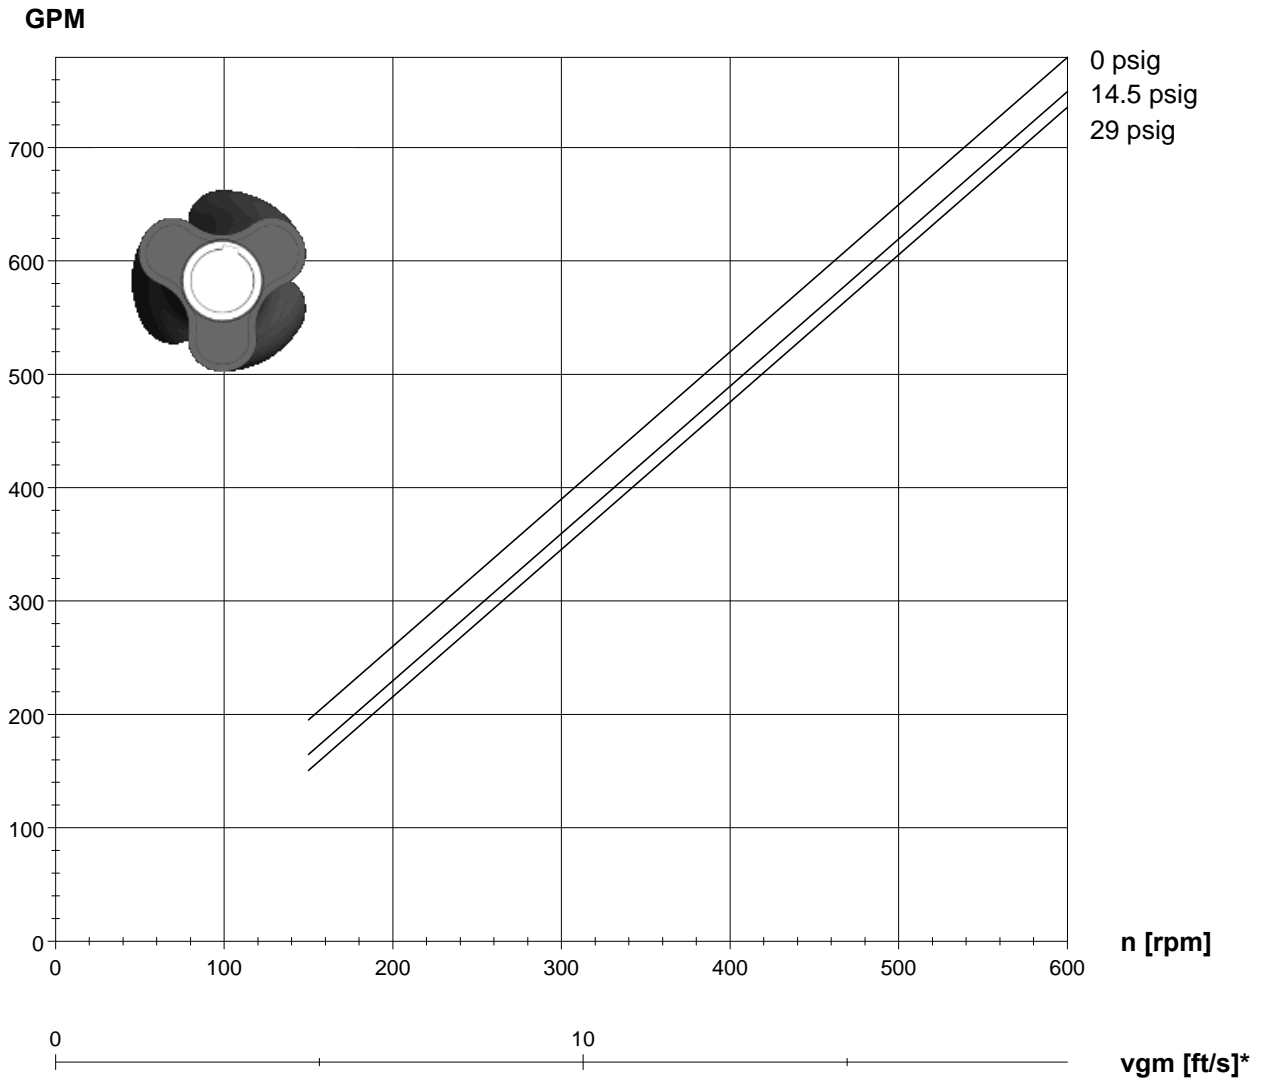

HP

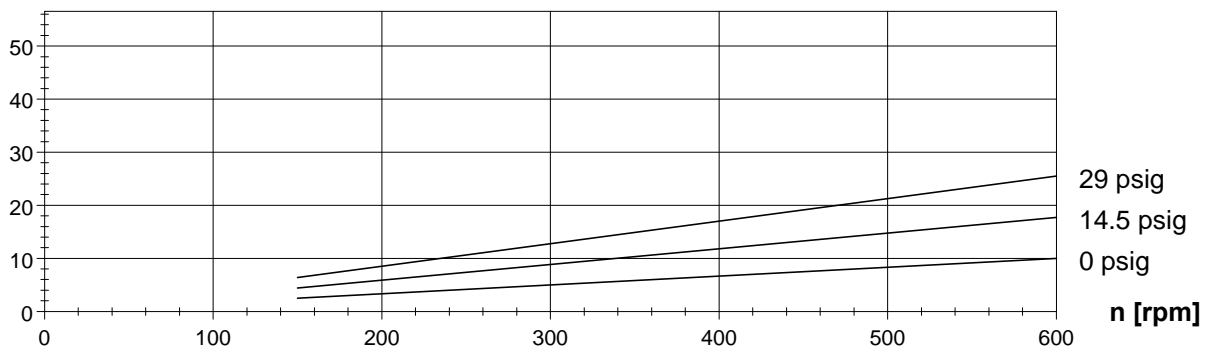

pressure	T
0 psig	87 lbft
14.5 psig	155 lbft
29 psig	224 lbft

* rubbing velocity at pitch diameter

Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 tolerance group II.

Rev.: 11/216 Technical changes reserved.